



19548 - 96th Avenue, Surrey, B.C. V4N 4C3
 Tel: 604-882-5112 ■ Email: info@vanaxle.com

www.vanaxle.com

Axle Capacity: 1100 lb. 2200 lb.
 3500 lb. 5200 lb. 7000 lb. 7200 lb.
 8000 lb. 10,000 lb. Other _____

Hub Face: _____ inches

Outside of Frame: _____ inches

Start Angle Degree:
 45° down 10° down 22.5° down 32° down
 0° 10° up 22.5° up

Hub: Idler Brake

If Brakes:
 Electric Hydraulic Drum Hydraulic Disc

Bolt Circle:
 4 - 4.0" 5 - 4.5" 5 - 4.75" 5 - 5.0"
 5 - 5.5" 6 - 5.5" 8 - 6.5"

Lubrication (check one):
 E-Z Lube Grease Oil Nev-R-Lube



Bracket Profile Low High

Bracket Orientation: Standard Reverse


Side Mount Hanger Kit: Yes No

Painted Yes No **Galvanized** Yes No

How To Measure

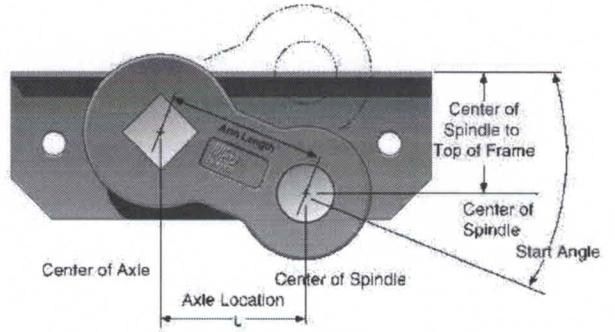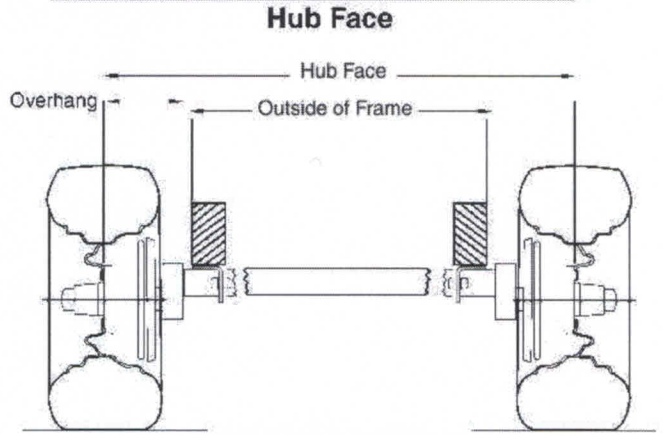

Bracket Orientation

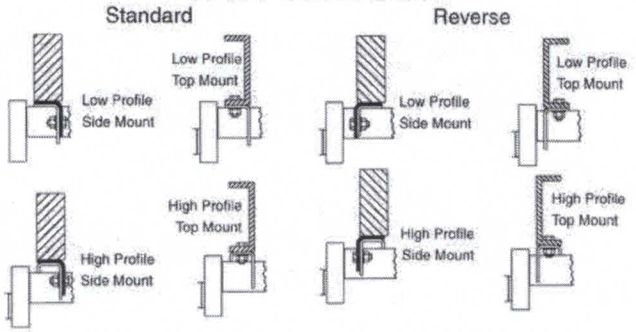

Date: _____



Customer Name: _____

Phone Number: _____

Fax Number: _____

E-Mail Address: _____

Bracket Profile

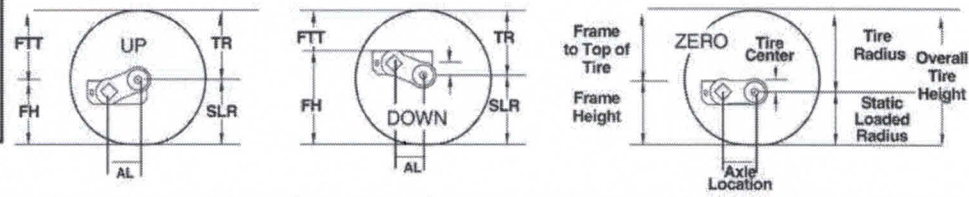

If due to a customer error...

TPDepot does not accept return of axles and/or beam assemblies unless a special restocking charge has been agreed upon. The standard restocking charge for these items is 50%. Axles and beams are items that have been custom made to a specific order. This, potentially, results in many components being scrapped. The customer is responsible for freight incurred for the return.

TORFLEX AXLE ORDER FORM